

makita

18V Brushless Loop Handle Line Trimmer

LXT

DUR192L

BRUSHLESS



Product Statement


The DUR192 is a lightweight, powerful line trimmer featuring a brushless motor powered by Makita's 18V LXT technology.

It produces 460W of max power output and has a max. cutting width of 300mm (12") making it perfect for a wide variety of tasks. It features two mode speed selection allowing the user to choose between Mode 1: 4,500rpm and Mode 2: 6,000rpm.

It's lightweight design of 3kg with a battery allows for long periods of use with minimal user fatigue.



Product Overview

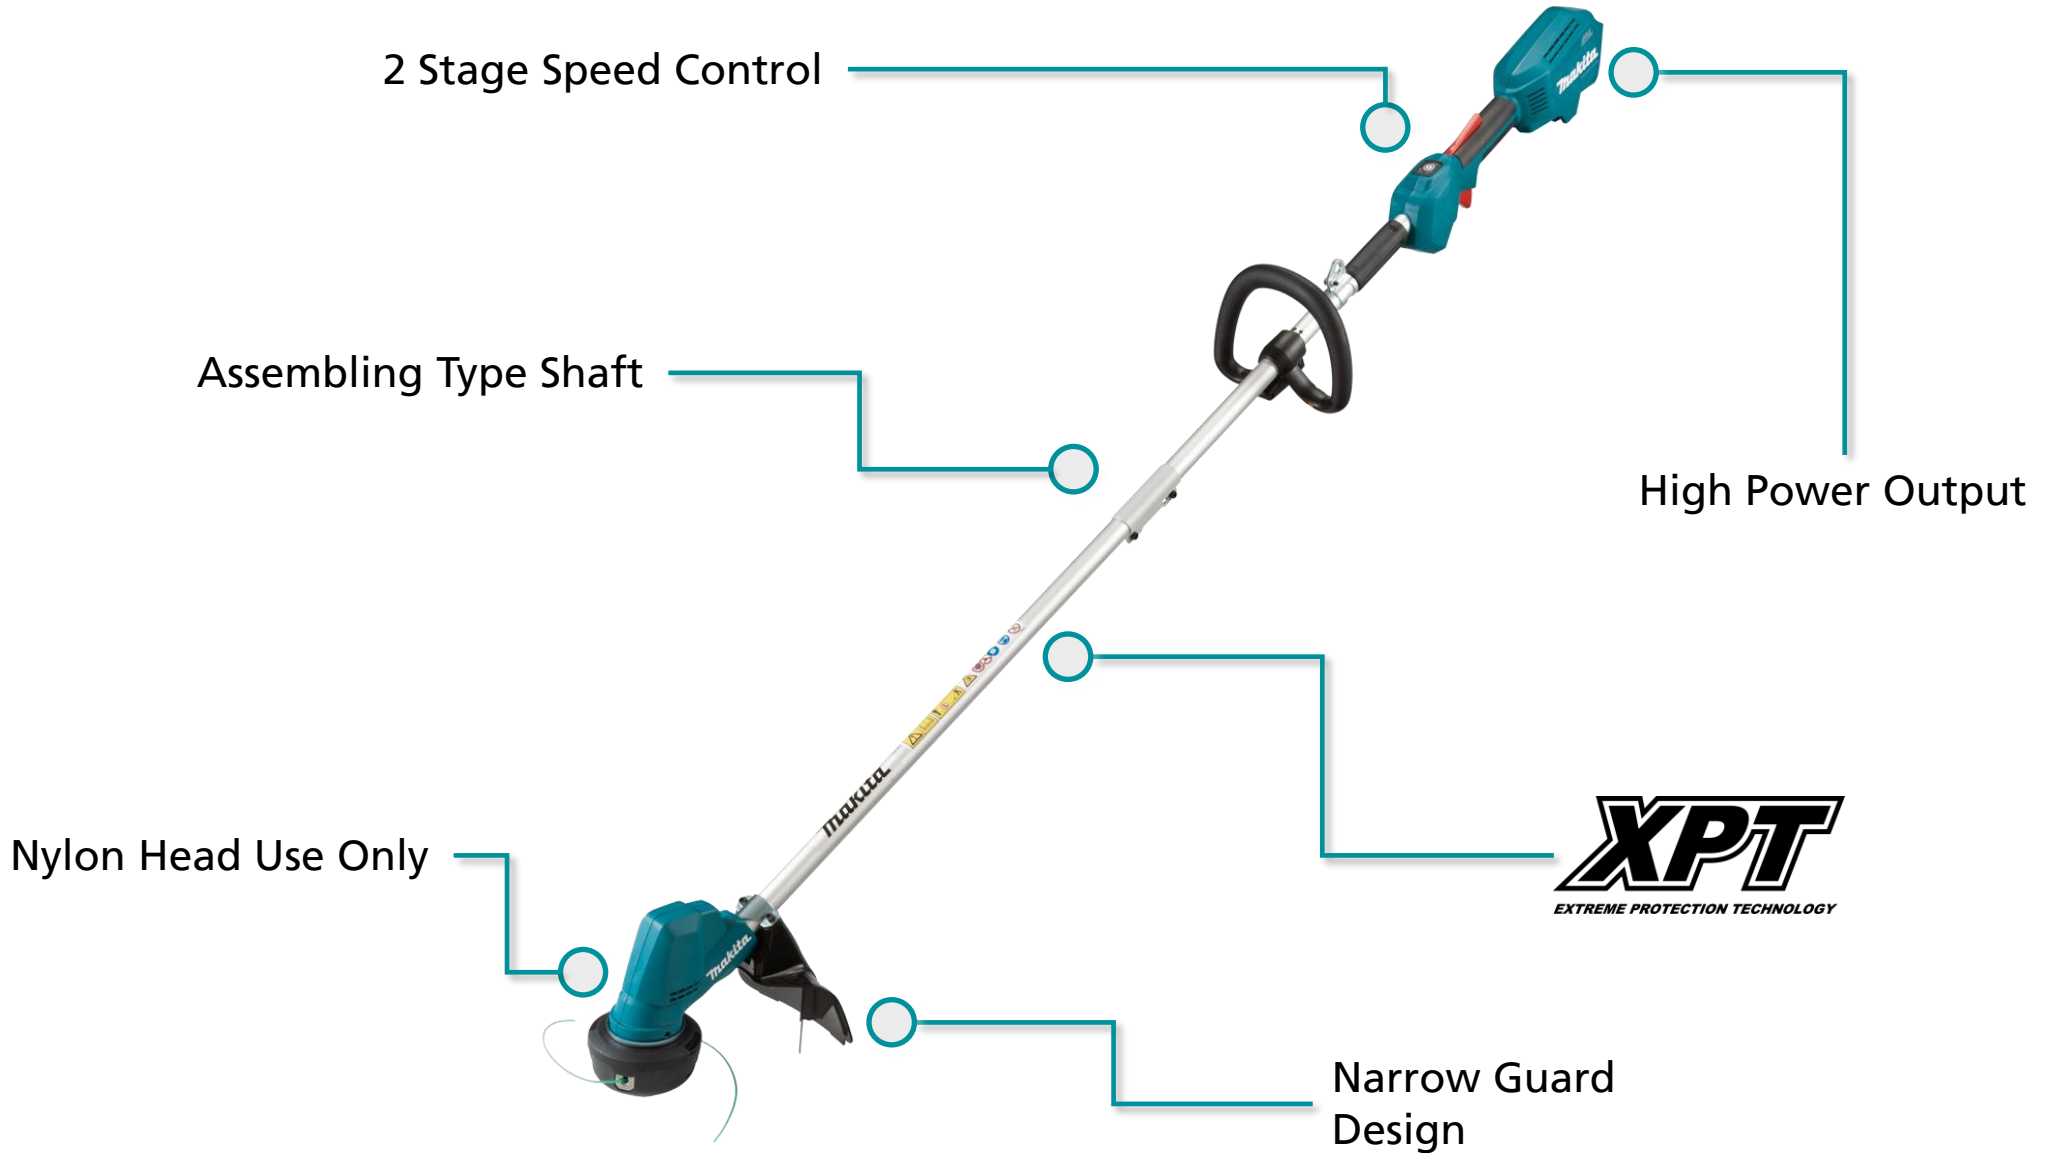

Product Specification Sheet



| | |
|-------------------------------|--|
| Max. Power Output | 0.46kW |
| No Load Speed | Lo: 0 – 4,500rpm High: 0 – 6,000rpm |
| Spindle Size | M10 x 1.25 LH |
| Nylon Head Accepts Nylon Line | 2.0mm x 3.0m |
| Max. Cutting Width | 300mm |
| Overall Length | 1,670mm |
| Skin Weight | 2.4kg |
| Weight (With Battery) | 3.0kg |
| Voltage | 18V |

- **2 Stage Speed Control** – allows the user to select the accurate speed for the job at hand, choosing between Low: 0 – 4,600rpm and High: 0 – 6,000rpm.
- **Assembly Type Shaft** – this trimmer comes folded to allow for easy transportation however once the trimmer has been put together, it is not able to be disassembled.
- **Nylon Head Use Only** – the 300mm cutting width is only suitable for use with nylon line. Metal/Plastic blades are not able to be connected to this model.
- **High Power Output** – produces 0.46kW of max power output, providing the power needed to take on the toughest tasks.
- **Extreme Protection Technology** – provides added protection by channelling dust and moisture away from the tool's key internal components.
- **Narrow Guard Design** – provides the user with a better line of sight to the nylon head, leading to more accurate trimming.

Performance




18V Brushless Motor

Ease Of Use



2 Stage Speed Control

Comfort

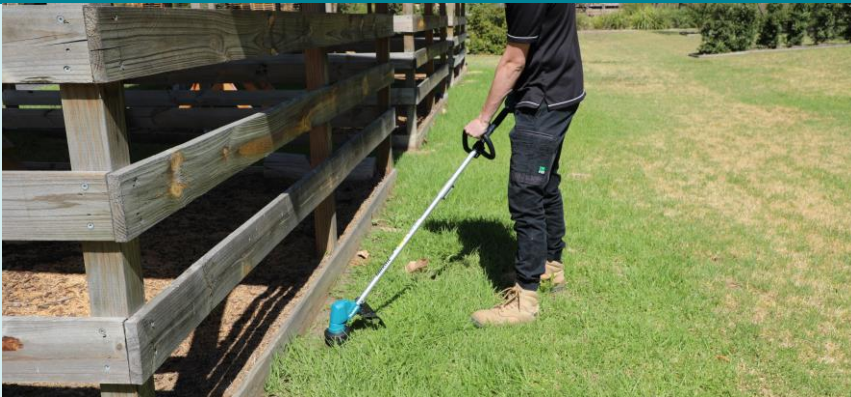

Lightweight Design at 3kg with battery


Ergonomics



Assembly Shaft Design for Easy Transportation

Our Range



| | DUR192LZ - NEW | DUR181Z | DUR189Z | DUR190LZX5 | DUR368LZ | DUR368AZ | DUR369LZ | DUR369AZ |
|-------------------------------|---|--|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |  |
| Rotation | Counter-clockwise | Counter-clockwise | Clockwise | Counter-clockwise | Counter-clockwise | Counter-clockwise | Counter-clockwise | Counter-clockwise |
| Max. Power Output | 0.46kW | 0.23kW | 0.24kW | 0.24kW | 0.55kW | 0.55kW | 1kW | 1kW |
| No Load Speed | Lo: 0 – 4,500rpm High: 0 – 6,000rpm | 7,800rpm | Lo: 0-4,000rpm Med: 0-5,000rpm High: 0-6,000rpm | Lo: 0-3,500rpm Med: 0-5,100rpm High: 0-6,000rpm | Hi: 6,500 rpm Med: 5,300rpm Lo: 3,500rpm | Hi: 6,500 rpm Med: 5,300rpm Lo: 3,500rpm | Hi: 7,000 rpm Med: 5,500rpm Lo: 4,600rpm | Hi: 7,000 rpm Med: 5,500rpm Lo: 4,600rpm |
| Spindle Size | M10 x 1.25 LH | - | M8 x 1.25RH | M10 x 1.25 LH | M10 x 1.25 LH | M10 x 1.25 LH | M10 x 1.25 LH | M10 x 1.25 LH |
| Nylon Head Accepts Nylon Line | 2.0mm x 3.0m | 1.6mm x 8m | 2.0 - 2.4mm x 3.0m | 2.0 - 2.4mm x 3.5m | 2.0 – 2.4mm x 3.5m | 2.0 – 2.4mm x 3.5m | 2.0 – 2.4mm x 3.5m | 2.0 – 2.4mm x 3.5m |
| Max. Cutting Width | 300mm (12") | 260mm (10") | 300mm (12") | 300mm (12") | 350mm (14") | 350mm (14") | 430mm (17") | 430mm (17") |
| Overall Length | 1,670mm | 1,433mm | 1,618mm | 1,836mm | 1,758mm | 1,758mm | 1,846mm | 1,846mm |
| Skin Weight | 2.4kg | 2.8kg | 2.8kg | 2.9kg | 3.9kg | 4.1kg | 5.1kg | 5.3kg |
| Weight (With Battery) | 3.0kg | 3.4kg | 3.4kg | 3.5kg | 4.5kg | 4.7kg | 6.3kg | 6.5kg |
| Voltage | 18V | 18V | 18V | 18V | 36V (18V x 2) | 36V (18V x 2) | 36V (18Vx2) | 36V (18Vx2) |

Standard Accessories

| | | |
|---|----------|---------------|
|  | 127508-0 | Band Assembly |
|  | 197804-0 | Trimmer Head |
|  | 783202-0 | Hex Wrench 4 |

Optional Equipment

| | | |
|---|--|--|
|  | E-01797 E-01806 E-01812 | Four Leaf Silent Nylon Line 2.4mm x 15m 2.4mm x 30m 2.4mm x 225m |
|  | P-76788 P-76825 P-76869 | Pro-Series Nylon Line 2.4mm x 15m 2.4mm x 44m 2.4mm x 87mm |
|  | 369.224.602 369.224.603 369.224.604 369.224.606 369.224.607 369.224.608 | Contractor Series Nylon Line 2.4mm x 15m - Round 2.4mm x 87m - Round 2.4mm x 262m - Round 2.4mm x 15m - Square 2.4mm x 69m - Square 2.4mm x 206m - Square |
|  | 369.224.071 369.224.070 369.224.072 | Elite Silent Nylon Line 2.4mm x 3.5m 2.4mm x 15m 2.4mm x 120m |
|  | BL1830B BL1840B BL1850B BL1860B | Batteries 18V 3.0Ah Battery 18V 4.0Ah Battery 18V 5.0Ah Battery 18V 6.0Ah Battery |
|  | DC18SD DC18RC DC18SF DC18RE DC18RD | Chargers 18V Optimum Charger 18V Rapid Charger 18V 4 Port Optimum Charger 18V/12V Dual Voltage Charger 18V Dual Port Rapid Charger |